


BICYCLE LANE

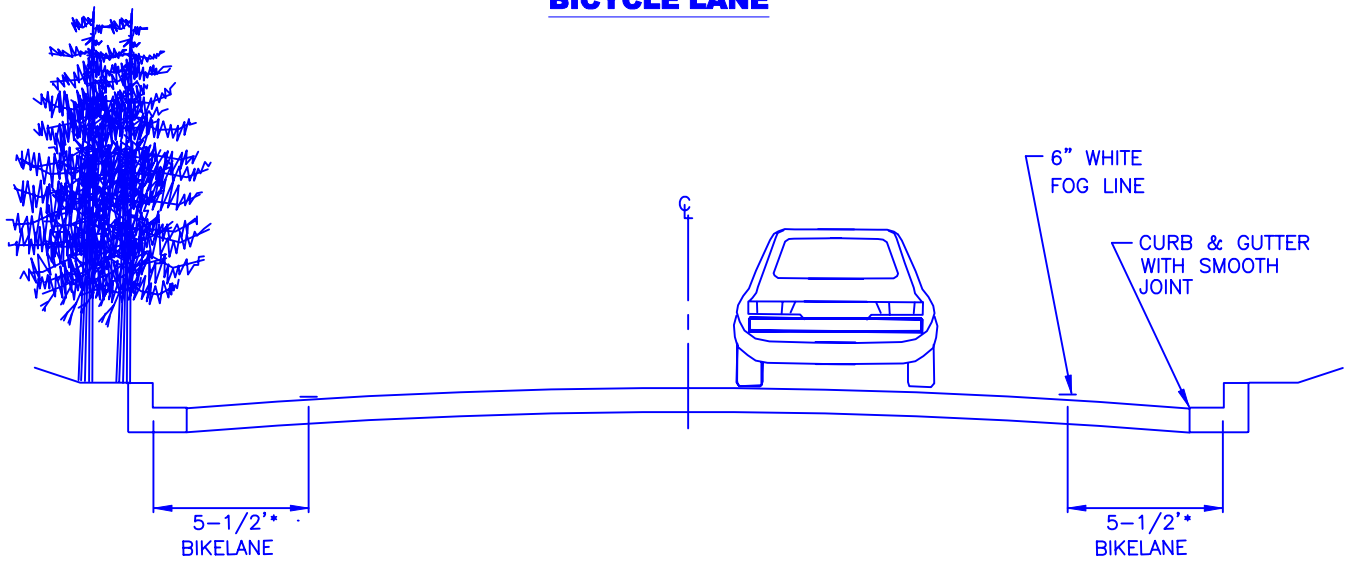


NOTE:

IF NO CURB & GUTTER, THE BIKELANE MINIMUM WIDTH OF 4' WITH A 2' MINIMUM GRADED SHOULDER IS REQUIRED.

ADDITIONAL WIDTHS ARE DESIRABLE WITH HIGH TRUCK VOLUMES OR SPEEDS GREATER THAN 35 MPH.

BICYCLE LANE WITH PARKING ON STREET

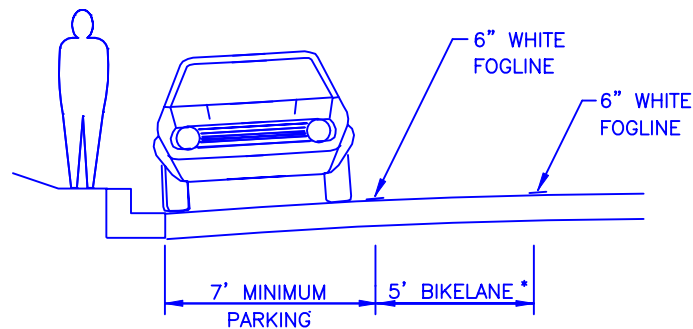


NOTE:

REFLECTORS AND RAISED PAVEMENT MARKERS NOT TO BE USED FOR FOG LINE ALONG BIKE LANE.

ADDITIONAL WIDTHS ARE DESIRABLE WITH HIGH TRUCK VOLUMES OR SPEEDS GREATER THAN 35 MPH.

NO SCALE

APPROVED: <u>DAVE ALM</u> REV. DATE: <u>JULY 1, 2000</u>			STANDARD DETAILS			
TRANSPORTATION DIVISION			BICYCLE LANES ELEVATION VIEW			
			FILE	SD319.DWG	DRAWING NO.	319